

DISTRIBUTOR/AGENT:	DATE OF ORDER:
	DATE OF DELIVERY:
	NAME OF THE ADDRESSEE/USER:

MODULAR POSTURAL SYSTEM that can be positioned on INDOOR and OUTDOOR BASE



FEATURES

Postural SEAT easily reversible with SERVO-ASSISTED TILTING AND RECLINING SYSTEM

- **Tilting seating unit** operated by gas spring, **removable** thanks to a practical, safe, and foolproof attachment/detachment system, quickly reversible to face the parent (outdoor base), **equipped with a visual safety system**. The backrest is adjustable in height, the seat in depth and the width can be adjusted via multi-adjustable lateral supports. All the adjustments are precise and continuous.
- The upholstery of the seat is extremely breathable, comfortable, durable, easy to wash, and quick to dry, consisting of:
 - » **Non-removable supporting upholstery:** the texture with an essential design allows an **excellent breathability**, reducing sweating and bacterial growth. The fabric composition allows an **easy sanitization. It maintains performance even at high loads and is fire retardant** according to class 1 fire reaction (non-flammable combustible materials) according to Ministerial Decree June 26, 1984, and subsequent amendments.
 - » **The removable cover** is made of breathable and **highly innovative** material both internally and externally. The internal fabric is three-dimensional, lightweight, and provides high air circulation. It allows an **optimal weight distribution** and **great comfort**. The external fabric is also highly resistant to abrasion. Fireproof according to EN 1021-1:2014 and EN 1021-2:2014 standards. Washable at 40°C. Easily removable for washing with **quick drying times**.
- **Reclining backrest** with gas spring and height-adjustable precisely and continuously. The backrest has a **restraining shape** and, thanks to the resistant bearing upholstery and **aluminum bars**, provides a comfortable and breathable support.
- **Integrated headrest** in the backrest to ensure the child always has support when the seating unit is tilted and/or the backrest is reclined.
- **Includes the mod. 947 pelvic belt with variable angle.**
- **Wide and padded armrests**, adjustable in height, width, and inclination (they follow the adjustments of the pelvis lateral supports).
- Adjustable **pelvic supports** for containment in width, rotation, and depth independently.
- Height and angle-adjustable **leg rest** with physiological pivot, making the adjustment comfortable. Adjustable in depth along with the seat.
- **Adjustable single footrest with heel stops** or **adjustable separate footrests** (component mod. 957).
- **Lateral shoulder supports** mod. 967 provided as standard in the outdoor version.

OUTDOOR BASE (CRASH TESTED according to ISO 7176/19 and ANSI RESNA WC/19 standards) **parent-facing reversible.**

- Compact and lightweight **frame** with a new innovative design, easily maneuverable and foldable, with a tilt-adjustable handlebar. **It reduces depth space.**
- Solid, lightweight, and smooth-running **wheels** on all surfaces: 17 cm (6,7 in) front wheels with direction locks, 30 cm (11,8 in) rear wheels, with shock absorbers and independent drum and parking brakes.

HIGH LOW INDOOR BASE

- **Compact frame with height adjustment** - to allow approaching support and work surfaces - with gas spring adjustment while the child is seated. **The height adjustment system is internationally patented.**
- **Active tilt-in-space:** useful for positioning the child in an active position, to perform activities that stimulate straightening and activation of the posterior musculature.
- **Solid twin wheels** 7,5 cm (2,9 in), swiveling, **with rubber coating**. All equipped with parking brakes.



Attention!
Read carefully the user and maintenance manual

CHOOSE THE COLOR OF THE POSTURAL SEATING UNIT



Coral pink



Sky blue



Brown



CHOOSE THE BASE (both can also be selected)



OUTDOOR USE



INDOOR USE




GAS SPRING for seat height adjustment (INDOOR BASE):

STANDARD (600N) for user up to 45 kg (99 lb).

LIGHTER (400N) for user up to 35 kg (77 lb).




IF THE GAS SPRING IS NOT SELECTED, the indoor base will be sent with **STANDARD GAS SPRING**.




USER HEIGHT: 115-140 cm
45,2-55,1 in
MAX LOAD: 45 kg
99 lb

MEASURES in cm and (inches)

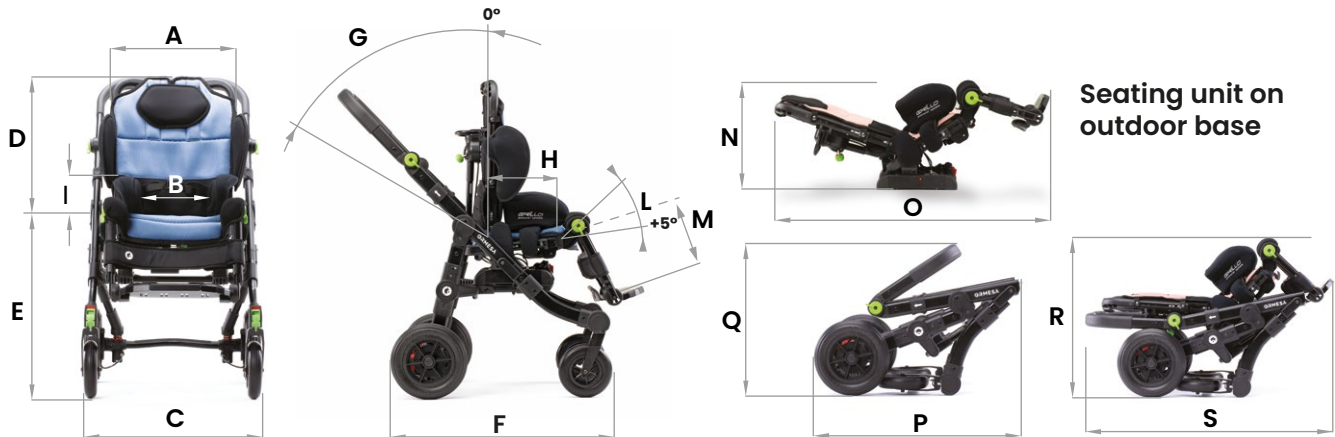

Seating unit on outdoor base

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	Frame weight	Seating unit weight	Total weight
44 (17,3)	25-35 (9,8-13,7)	63 (24,8)	60-75 (23,6-29,5)	55 (21,6)	81 (31,8)	45°	28-40 (11-15,7)	16-20 (6,2-7,8)	25°	26-38 (10,2-14,9)	34 (13,3)	88 (34,6)	70 (27,5)	58 (22,8)	66 (25,9)	88 (34,6)	11,8 kg (26 lb)	13,2 kg (29,1 lb)	25 kg (55 lb)

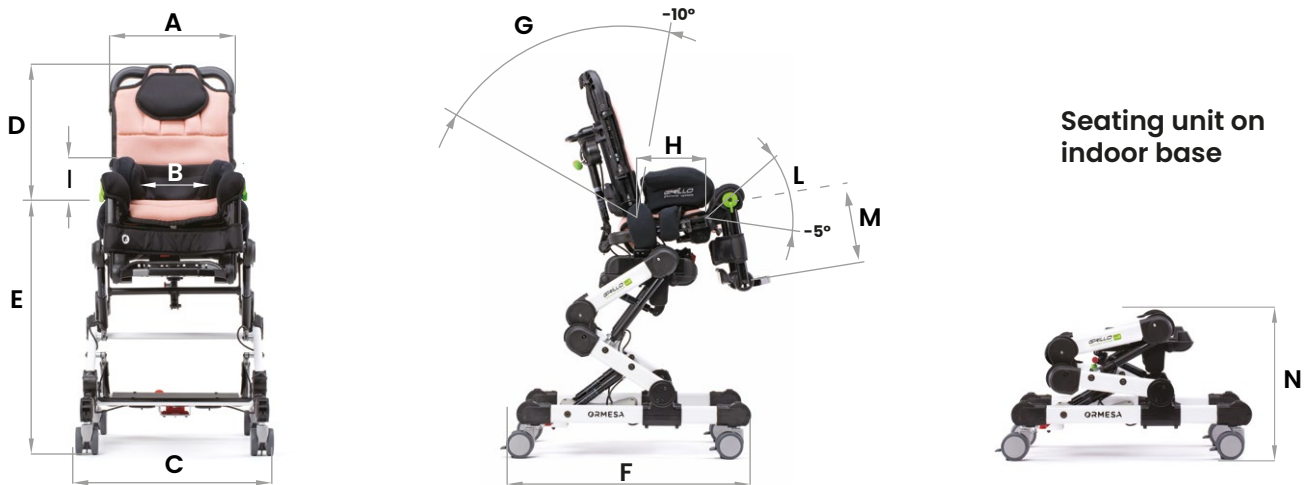

Seating unit on indoor base

A	B	C	D	E	F	G	H	I	L	M	N	Frame weight	Seating unit weight	Total weight
44 (17,3)	25-35 (9,8-13,7)	58 (22,8)	60-75 (23,6-29,5)	45-65 (17,7-25,5)	74 (29,1)	45°	28-40 (11-15,7)	16-20 (6,2-7,8)	35°	26-38 (10,2-14,9)	41 (16,1)	14,9 kg (32,8 lb)	13,2 kg (29,1 lb)	28,1 kg (61,9 lb)

ADDITIONAL COMPONENTS for both BASES

863 Postural headrest adjustable in height, width, tilt and depth, with adjustable side supports.

mini/S M



942 Ergonomic and mouldable headrest adjustable in height, tilt and forward-backward. With adjustable sides.

mini/S M L



835 Padded shaped headrest, adjustable in height. Size S/M.



852 Headrest with parietal supports adjustable in width.

mini/S M



838 Trunk side supports adjustable in height, width and transversally.

S M



967 Shoulders lateral supports. Standard on outdoor base.

Optional component for the indoor base.



868 Wrappable and flexible trunk supports adjustable in height, width and transversally. Size S/M



853 Vest harness. Size S



853 slim Four point shaped harness



947 pelvic belt with variable angle as standard.

S M



920 Four point pelvic belt

S M



834N Padded narrow abduction block.

mini/S M




834R Adjustable abduction block.

mini/S M



969 Postural pads kit.




824 Transparent tray adjustable in height, depth and tilt.



827 Foot straps for single footrest.



957 Legrest with separate footrests. Adjustable in height, inclination and abduction independently.



960 Heelrests only with legrest 957.



962 Footrests + Heelrests, only with legrest 957.



ADDITIONAL COMPONENTS for OUTDOOR BASE

839 Padded front handle Adjustable in height and tilt.



819 Versatile canopy.



825 Rain cover. Only with canopy 819.

891 Set of 4 tie down hooks for the forward-facing transport of the pushchair in a motor vehicle (cars, buses...)



COMPLIANT WITH ISO 7176/19 and ANSI RESNA WC/19 STANDARDS



818 Padded thermal cover.



858 Shopping and vent tray basket.



935 Oxygen bottle holder.



922 Bottle holder.



905 Hand brake.



ADDITIONAL COMPONENTS for INDOOR BASE


961 Elbow side supports.
Height adjustable.



824B
Wide, resistant and hygienic table, suitable for food contact.
Multiadjustable.




863




mini/S A= 12 - 21 cm
4,7 - 8,2 in


Medium A= 15- 27 cm
5,9-10,6 in




942



mini/S A= 14 cm/5,5 in
Medium A= 16 cm/6,2 in
Large A= 17 cm/6,6 in




852



mini/S A= 12 - 21 cm
4,7 - 8,2 in


Medium A= 15- 27 cm
5,9-10,6 in

835



S/M A= 18 cm/7 in


947



Small
A= 19 cm/7,4 in
B= 6 cm/2,3 in


Medium
A= 25,5 cm /10 in
B= 8 cm/3,1 in

868




S/M
A= 26 cm/10,2 in
B= 9 cm/3,5 in

920




Small Medium
A= 16 cm/6,2 in A= 23 cm/9 in
B= 15,5 cm /6 in B= 19 cm/7,4 in

838

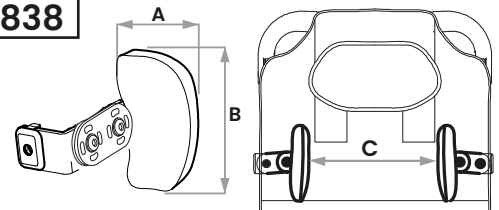


Small Medium C= 25-35 cm/9,8-13,8 in
A= 10 cm /3,9 in A= 11 cm/4,3 in
B= 12 cm /4,7 in B= 17 cm/6,6 in

853




Small
A= 25 cm/9,8 in
B= 34 cm/13,3 in

853 slim



Medium
A= 33 cm/12,9 in
B= 46 cm/18,1 in
C= 5 cm/1,9 in

969

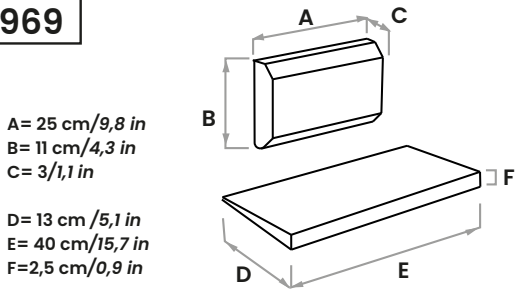


A= 25 cm/9,8 in
B= 11 cm/4,3 in
C= 3/1,1 in

D= 13 cm /5,1 in
E= 40 cm/15,7 in
F= 2,5 cm/0,9 in

834R

mini/S
A= 12 cm/4,7 in
B= 8-10 cm/3,1-3,9 in
C= 9 cm/3,5 in


Medium
A= 14 cm/5,5 in
B= 10-13 cm/3,9-5,1 in
C= 13 cm/5,1 in



834N


mini/S
A= 12 cm/4,7 in
B= 4 cm/1,5 in
C= 14 cm/5,5 in

Medium
A= 15 cm/5,9 in
B= 4 cm/1,5 in
C= 17 cm/6,6 in




824B

A= 16 cm/6,2 in
B= 38 cm/14,9 in
C= 53 cm/20,8 in
D= 64 cm/25,1 in




824

A= 13 cm/5,1 in
B= 30 cm/11,8 in
C= 40 cm/15,7 in
D= 48 cm/18,8 in



858

A= 16 cm /6,2 in
B= 40 cm/15,7 in
C= 27 cm/10,6 in



957

A= 15° of abduction
on indoor base
A= 5° of abduction
on outdoor base

