

DISTRIBUTOR/AGENT:	DATE OF ORDER:
	DATE OF DELIVERY:
	NAME OF THE ADRESSEE/USER

## MODULAR POSTURAL SYSTEM that can be positioned on INDOOR and OUTDOOR BASE



### FEATURES

#### Postural SEAT easily reversible with SERVO-ASSISTED TILTING AND RECLINING SYSTEM

- **Tilting seating unit** operated by gas spring, **removable** thanks to a practical, safe, and foolproof attachment/detachment system, quickly reversible to face the parent (outdoor base), **equipped with a visual safety system**. The backrest is adjustable in height, the seat in depth and the width can be adjusted via multi-adjustable lateral supports. All the adjustments are precise and continuous.
- The upholstery of the seat is extremely breathable, comfortable, durable, easy to wash, and quick to dry, consisting of:
  - » **Non-removable supporting upholstery:** the texture with an essential design allows an **excellent breathability**, reducing sweating and bacterial growth. The fabric composition allows an **easy sanitization. It maintains performance even at high loads and is fire retardant** according to class 1 fire reaction (non-flammable combustible materials) according to Ministerial Decree June 26, 1984, and subsequent amendments.
  - » **The removable cover** is made of breathable and **highly innovative** material both internally and externally. The internal fabric is three-dimensional, lightweight, and provides high air circulation. It allows an **optimal weight distribution** and **great comfort**. The external fabric is also highly resistant to abrasion. Fireproof according to EN 1021-1:2014 and EN 1021-2:2014 standards. Washable at 40°C. Easily removable for washing with **quick drying times**.
- **Reclining backrest** with gas spring and height-adjustable precisely and continuously. The backrest has a **restraining shape** and, thanks to the resistant bearing upholstery and **aluminum bars**, provides a comfortable and breathable support.
- **Integrated headrest** in the backrest to ensure the child always has support when the seating unit is tilted and/or the backrest is reclined.
- **Includes the mod. 947 pelvic belt with variable angle.**
- **Wide and padded armrests**, adjustable in height, width, and inclination (they follow the adjustments of the pelvis lateral supports).
- Adjustable **pelvic supports** for containment in width, rotation, and depth independently.
- Height and angle-adjustable **leg rest** with physiological pivot, making the adjustment comfortable. Adjustable in depth along with the seat.
- **Adjustable single footrest with heel stops** or **adjustable separate footrests** (component mod. 957).
- **Lateral shoulder supports** mod. 967 provided as standard in the outdoor version.

#### OUTDOOR BASE (CRASH TESTED according to ISO 7176/19 and ANSI RESNA WC/19 standards) **parent-facing reversible.**

- Compact and lightweight **frame** with a new innovative design, easily maneuverable and foldable, with a tilt-adjustable handlebar. **It reduces depth space.**
- Solid, lightweight, and smooth-running **wheels** on all surfaces: 17 cm (6,7 in) front wheels with direction locks, 25 cm (9,8 in) rear wheels, with shock absorbers and independent drum and parking brakes.

#### HIGH LOW INDOOR BASE

- **Compact frame with height adjustment** - to allow approaching support and work surfaces - with gas spring adjustment while the child is seated. **The height adjustment system is internationally patented.**
- **Active tilt-in-space:** useful for positioning the child in an active position, to perform activities that stimulate straightening and activation of the posterior musculature.
- **Solid twin wheels** 7,5 cm (2,9 in), swiveling, **with rubber coating**. All equipped with parking brakes.



**Attention!**  
Read carefully the user and maintenance manual


### CHOOSE THE COLOR OF THE POSTURAL SEATING UNIT

Coral pink    Sky blue    Brown




### CHOOSE THE BASE (both can also be selected)

OUTDOOR USE    INDOOR USE




USER HEIGHT: 75-105 cm  
29,5-41,3 in  
MAX LOAD: 25 kg  
55,1 lb

### MEASURES in cm and (inches)

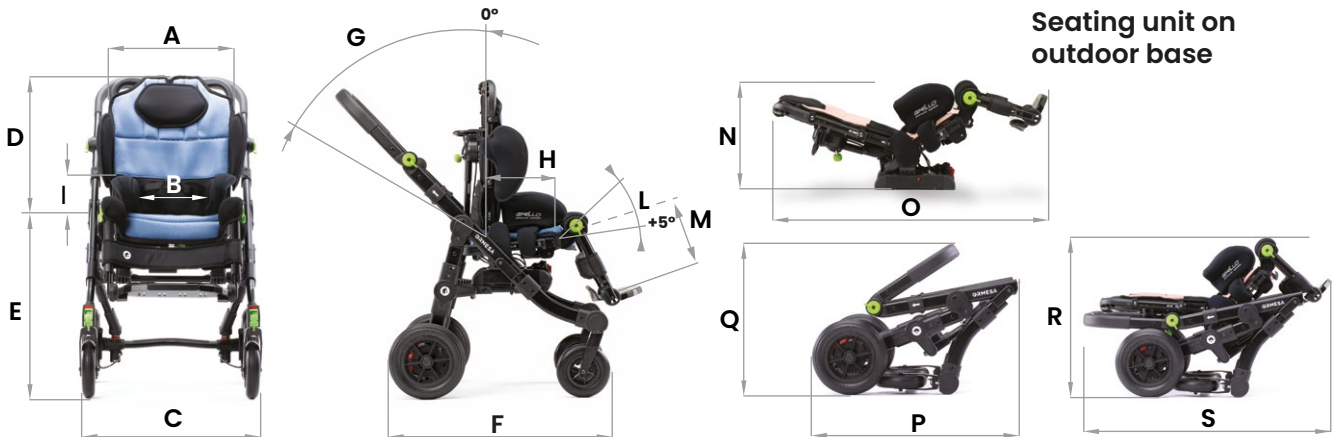

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R	S	Frame weight	Seating unit weight	Total weight
34 (13,4)	16-26 (6,2-10,2)	57 (22,4)	42-52 (16,5-20,4)	51 (20)	72 (28,3)	45°	16-26 (6,2-10,2)	11,5-14 (4,5-5,5)	30°	15-25 (5,9-9,8)	31 (12,2)	65 (25,5)	69 (27,1)	49 (19,2)	57 (22,4)	80 (31,4)	10,8 kg (23,8 lb)	9,7 kg (21,3 lb)	20,5 kg (55 lb)

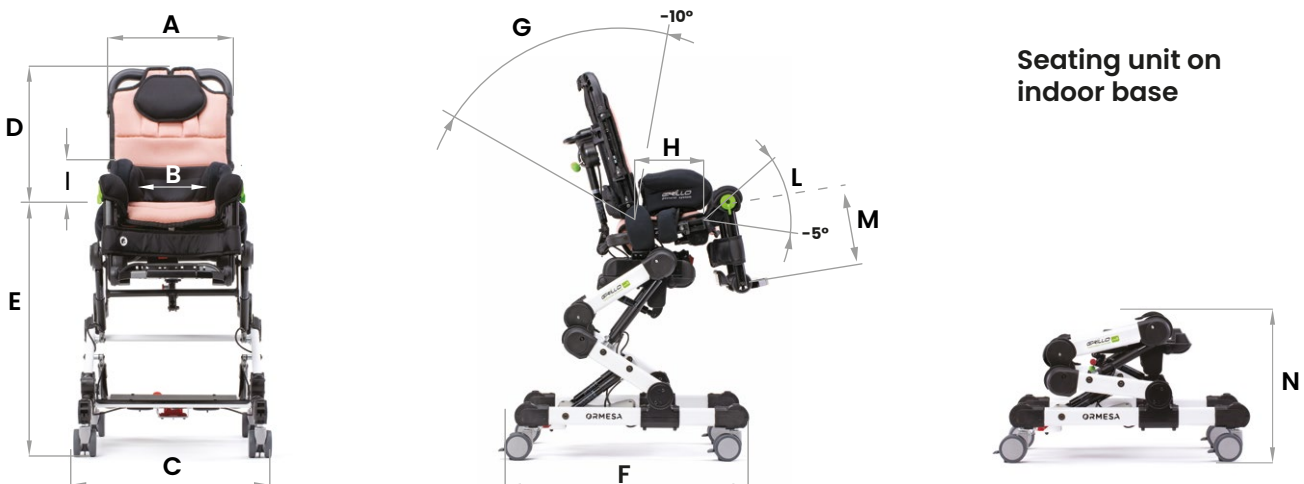

A	B	C	D	E	F	G	H	I	L	M	N	Frame weight	Seating unit weight	Total weight
34 (13,4)	16-26 (6,2-10,2)	53 (20,8)	42-52 (16,5-20,4)	45-65 (17,7-25,5)	65 (25,5)	45°	16-26 (6,2-10,2)	11,5-14 (4,5-5,5)	40°	15-25 (5,9-9,8)	40 (15,7)	14,3 kg (31,5 lb)	9,7 kg (21,3 lb)	24 kg (52,9 lb)

### ADDITIONAL COMPONENTS for both BASES

<input type="checkbox"/> <b>863 Postural headrest</b> adjustable in height, width, tilt and depth, with adjustable side supports. Size mini/S. 	<input type="checkbox"/> <b>942 Ergonomic and mouldable headrest</b> adjustable in height, tilt and forward-backward with adjustable sides. Size mini/S. 	<input type="checkbox"/> <b>835 Padded shaped headrest</b> adjustable in height. 	<input type="checkbox"/> <b>852 Headrest with parietal supports</b> adjustable in width. Size mini/S. 	
<input type="checkbox"/> <b>838 Trunk side supports</b> adjustable in height, width and transversally. 	<input type="checkbox"/> <b>967 Shoulders lateral supports.</b> Standard on outdoor base. <input type="checkbox"/> Optional component for the indoor base 	<input type="checkbox"/> <b>868 Wrappable and flexible trunk supports</b> adjustable in height, width and transversally. 	<input type="checkbox"/> <b>853 Vest harness</b> 	<input type="checkbox"/> <b>853H Harness.</b> 
<input type="checkbox"/> <b>947 pelvic belt with variable angle</b> as standard. Size mini. 	<input type="checkbox"/> <b>834N Padded narrow abduction block.</b> Size mini/S. 	<input type="checkbox"/> <b>834R Adjustable abduction block.</b> Size mini/s. 	<input type="checkbox"/> <b>969 Postural pads kit.</b> 	<input type="checkbox"/> <b>824 Transparent tray</b> adjustable in height, depth and tilt. 
<input type="checkbox"/> <b>827 Foot straps</b> for single footrest. 	<input type="checkbox"/> <b>957 Legrest with separate footrests.</b> Adjustable in height, inclination and abduction independently. 	<input type="checkbox"/> <b>960 Heelrests only with legrest 957.</b> 	<input type="checkbox"/> <b>962 Footrests + Heelrests,</b> only with legrest 957. 	

### ADDITIONAL COMPONENTS for OUTDOOR BASE

<input type="checkbox"/> <b>839 Padded front handle</b> Adjustable in height and tilt. 	<input type="checkbox"/> <b>819 Versatile canopy.</b> 	<input type="checkbox"/> <b>825 Rain cover.</b> Only with canopy 819. 	<input type="checkbox"/> <b>891 Set of 4 tie down hooks</b> for the forward-facing transport of the pushchair in a motor vehicle (cars, buses...) <div style="text-align: center;">  <p>COMPLIANT WITH ISO 7176/19 and ANSI RESNA WC/19 STANDARDS</p> </div> 	
<input type="checkbox"/> <b>818 Padded thermal cover.</b> 	<input type="checkbox"/> <b>858 Shopping and vent tray basket.</b> 	<input type="checkbox"/> <b>935 Oxygen bottle holder.</b> 	<input type="checkbox"/> <b>922 Bottle holder.</b> 	<input type="checkbox"/> <b>905 Hand brake.</b> 

### ADDITIONAL COMPONENTS for INDOOR BASE

**961** Elbow side supports.  
Height adjustable.





**824B** Wide, resistant and hygienic table, suitable for food contact.  
Multiadjustable.





### COMPONENTS MEASURES


**863**




**942**





**852**




**835**




**838**




**947**



**868**




**853**




**969**

A= 19 cm/7,4 in  
B= 7 cm/2,7 in  
C= 2 cm/0,78 in  
D= 7 cm/2,7 in  
E= 30 cm/11,8 in  
F= 2 cm/0,78 in




**834R**

mini/Small  
A= 12 cm/4,7 in  
B= 8-10 cm/3,1-3,9 in  
C= 9 cm/3,5 in




**834N**

mini/Small  
A= 12 cm/4,7 in  
B= 4 cm/1,5 in  
C= 14 cm/5,5 in



**858**


A= 16 cm/6,2 in  
B= 40 cm/15,7 in  
C= 27 cm/10,6 in



5 kg./11 lb


**824B**

A= 16 cm/6,2 in  
B= 38 cm/14,9 in  
C= 53 cm/20,8 in  
D= 64 cm/25,1 in




**824**

A= 9 cm/3,5 in  
B= 21 cm/8,2 in  
C= 31 cm/12,2 in  
D= 39 cm/15,3 in



**957**

A= 15° of abduction  
on indoor base  
A= 5° of abduction  
on outdoor base



Notes:

.....

.....

.....

.....

.....